

---

# **QPAD Control Panel**

## **MK95 Quick Start Guide**



—  
**MK95**  
**INSTALLATION**

## INSTALLATION INFO




- Display resolution suggestion: **1600 x 900**
- Keyboard layout: 105 key UK legend
- Supporting **QPAD MK95** keyboard
- Double click the file to initiate installation wizard

# INSTALLATION FLOW



Step 1: Press “next” to continue

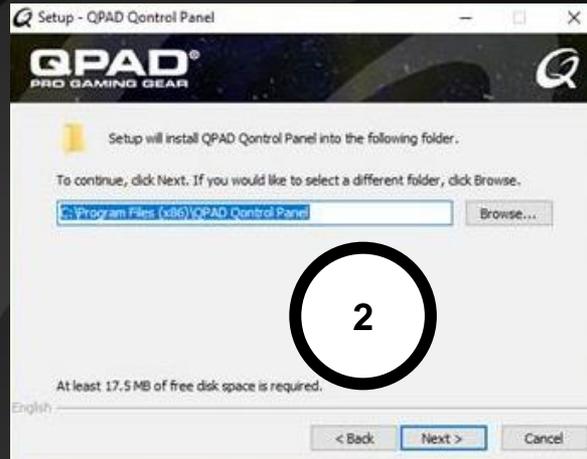

Step 2: Select the location and press “next” to continue




Step 3: Press “Install”

# INSTALLATION FLOW



Step 4: Installation page

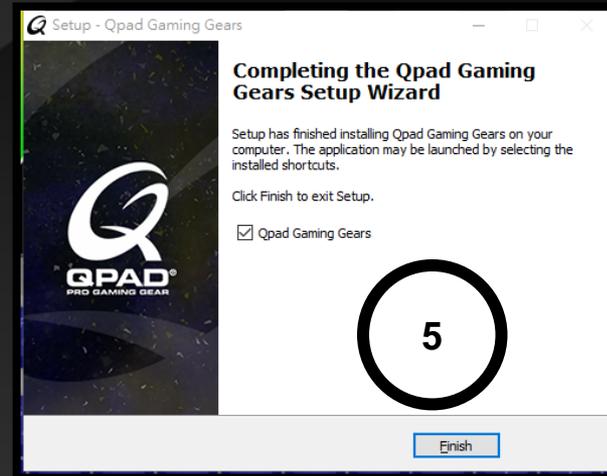

Step 5: Press “Finish” and launch the software

# ENTRY PAGE




Select "Lighting" or "Macros" wording to the settings panel



---

**MK95**  
**GENNERAL**  
**SETTING**

# GAME MODE

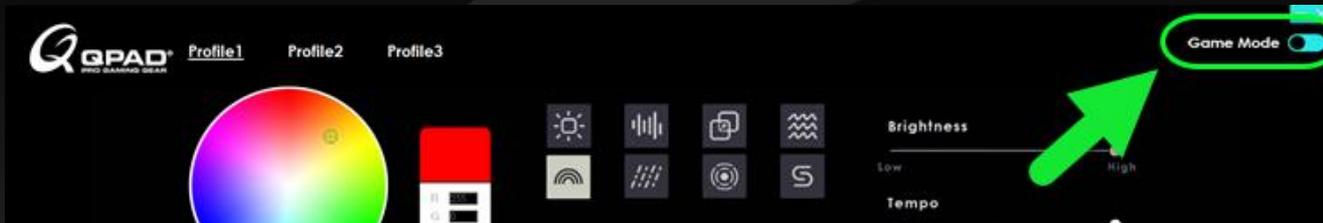

- On game mode, all the “MACROS” & “KEY ASSGIN” will be **activated**
- The Q-shift circular LED is blinking when game mode is ON.



# NORMAL MODE




- On normal mode, all the “MACROS” & “KEY ASSGIN” will be **deactivated**
- The Q-shift circular LED is static when normal mode is ON.



# PROFILE SETTING



- Double click to rename the profile
- Right click on profile to extend the list:
  - New: create a new profile; Max 10 profiles
  - Delete: delete the selected profile
  - Copy : copy the selected profile
  - Import: import an existing profile from which you have exported
  - Export: export & save the profile
  - Default: reset to the original settings

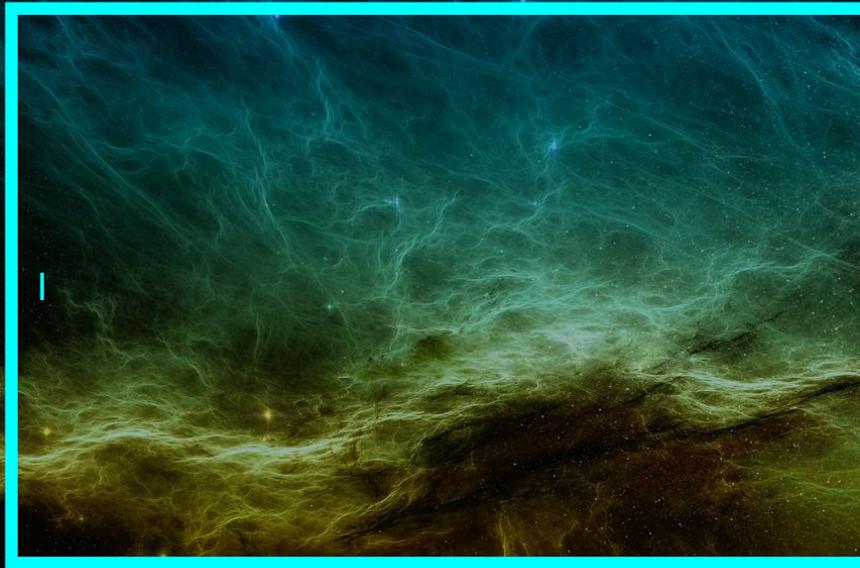

---

**MK95**  
**LIGHTING**  
**PANEL**

# LIGHTING

QPAD<sup>®</sup> PRO GAMING GEAR Profile1 Profile2 Profile3

Brightness  
Low High


Tempo  
Low High

Lighting >

Freely select your favourite colour via RGB numbering or choosing from the colour plate

8 LED Lighting modes & choosing between singular colour or rainbow effects


Adjust the LED brightness and tempo

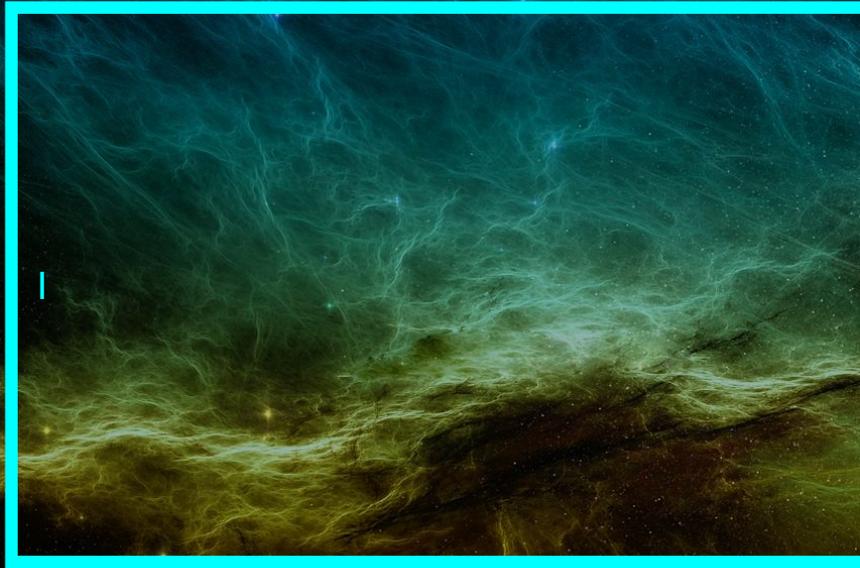

---

**MK95**  
**MARCOS**  
**PANEL**

# MARCOS

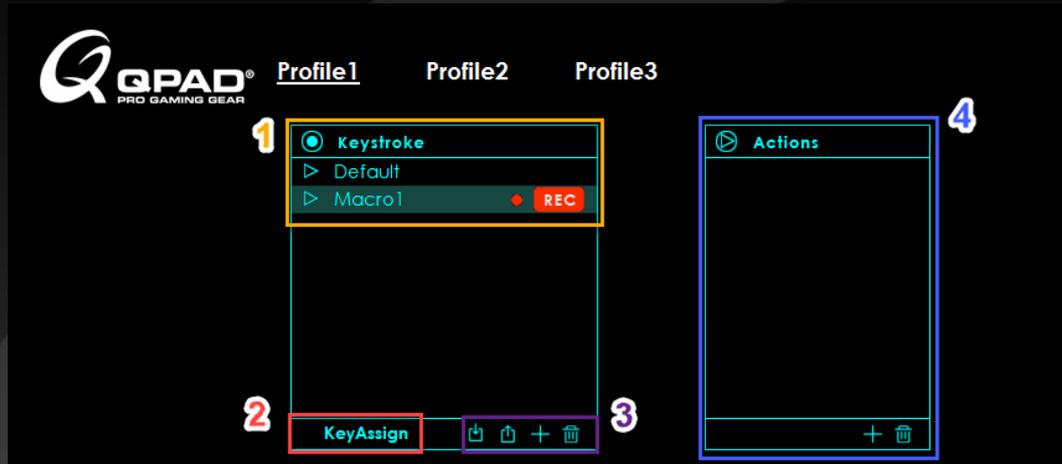

1. Marcos list

2. Switch to “Key Assign” settings

3. From left to right:  
Import profile setting / Export profile setting / add new Marco / delete Marco

4. Actions list, insert actions and delete actions

# MARCOS



1. Press REC to start record actions; Press REC again to end record actions

2. Press “+” icon to add one action after the action you click  
Select the action you want to delete and press “trashbin” icon to delete the action.

3. For instance, you can edit the time delay of each actions  
and press enter to save the changes.

# MARCOS



Drag the Marco from the wording to any key you want to set the Marco.  
Drop it onto your desired key and the color would change once the key has been appointed.

# MARCOS




Drag and drop the “ Default ” to delete the existing MARCOS key.

# KEY ASSIGN



1. Select "KeyAssign"

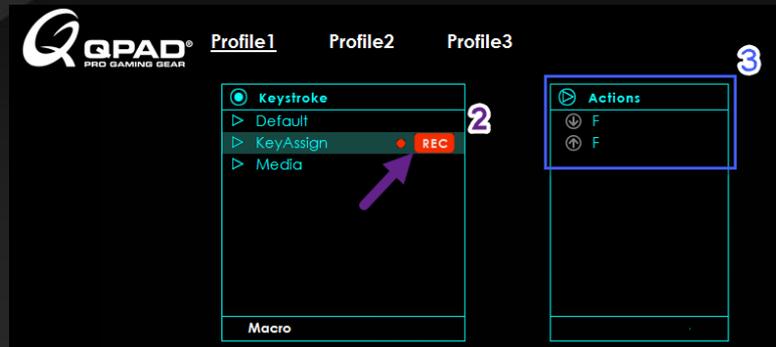

2. Press "REC" to start recording

3. For example – press "F" key for recording

# KEY ASSIGN



Drag the “KeyAssign” from the wording to any key you want.

Drop it onto your desired key and the color would change once the key has been appointed.

The key “A” currently had been assigned to key “F”.

# KEY ASSIGN



Drag and drop the “ Default ” to delete the existing KeyAssign.



---

**MK95**  
**SETTING**  
**PANEL**

# SETTING




Click the Settings to open the panel



Click the Settings again to close the panel

# SETTING

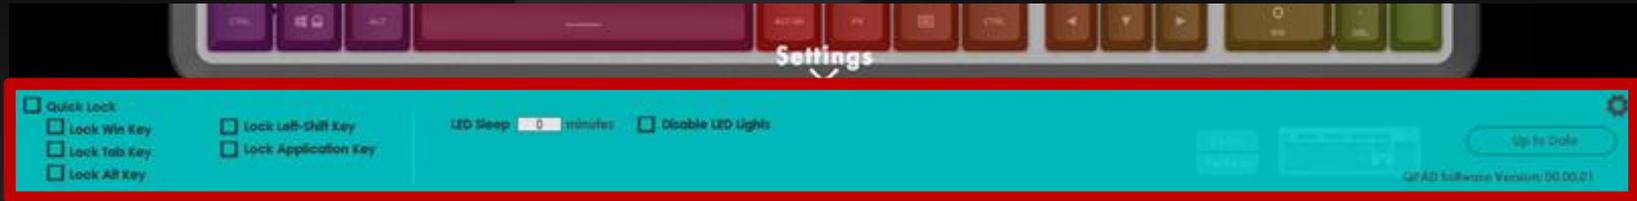

- Quick Lock: select all lock function
- LED sleep time: set the backlight sleep time (from 1 minute to 255 minutes)
- Disable LED lights: turn off all light including all indication lights
- Up to date: update the software to last version

# ON-THE-FLY SETTING

- FN + F1: decrease the brightness
- FN + F2: increase the brightness
- FN + F3: switch the back light color
- FN + F4: switch the light effect
- FN + F5: stop music
- FN + F6: previous one
- FN + F7: play/pause music
- FN + F8: Next one
- FN + F9: decrease volume
- FN + F10: increase volume
- FN + F11: mute
- FN + F12: switch game mode and normal mode
- FN + Windows key: lock and unlock windows key
- FN + ↑ : increase backlight speed
- FN + ↓ : decrease backlight speed



# Thank you

If you have any questions about this document  
please don't hesitate to contact us at:

[www.qpad.com](http://www.qpad.com)

---