

The background of the entire page is a complex technical drawing in white lines on a black background. It features various geometric shapes, including rectangles and triangles, with internal patterns of parallel lines and small circular icons. Some of the icons resemble electrical symbols or mechanical components. The drawing is oriented diagonally, creating a sense of depth and technical precision.

PATCHBOX

patchbox.one / Accessories

patchbox.one / Frame
patchbox.one / Patchcatch
patchbox.one / Blind Panels


patchbox.one / Frame

To build your own patchbox.one, you first need a Frame. It offers space for 24 Cable Cassettes, which can be easily replaced within seconds. You can choose from a range of cable types, cable colors, and connector types. The Frame is easily and quickly mounted and can be filled with different Cable Cassettes or Blind Panels to cover any unoccupied slots, making it completely modular.


Items included




6 x Patchcatch





2 x /dev/mount incl. Hex Nuts



2 x Mounting Rails incl. Hex Nuts



1x Frame

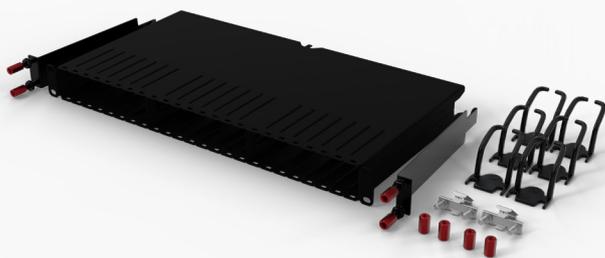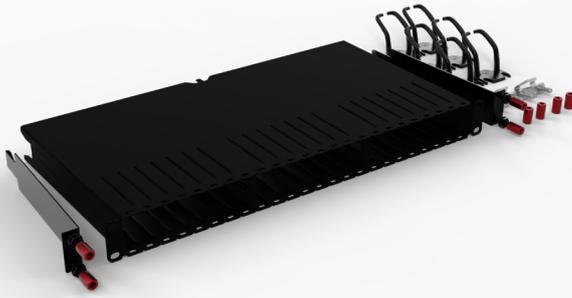

Technical Information

Frame

RAL9005 powder coated steel

Plastic Parts

Polyoxymethylene POM

Gross Weight

2.65 kg / 5.84 lbs

Mounting Rails

Steel and RAL9005

Operating Temperature Range

-20°C – 60°C

Ambient Humidity Non-Condensing

10% – 90%

Packaging Dimensions

Width: 520 mm Height: 50 mm Depth: 250 mm | Width: 20.47 in Height: 1.96 in Depth: 9.84 in


Custom Tariff Number

85447000

Width: 481 mm / 18.93 in

Depth: 240 mm / 9.44 in

Height: 50 mm / 1.96 in

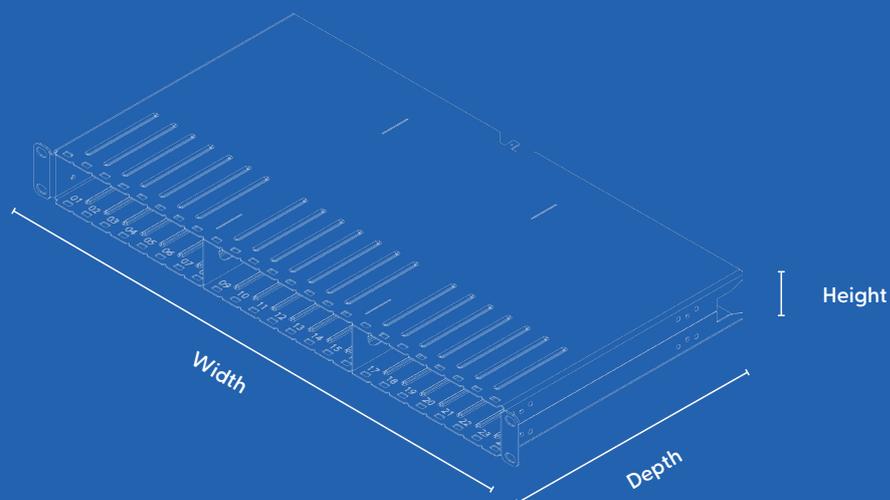


patchbox.one / Patchcatch

The Patchcatch is our ORU cable organizer for your network rack. Stop wasting precious rack units with horizontal or vertical cable managers. Use the innovative Patchcatch for optimal cable management. Simply guide the cables to the side of the RU they are patched to, to keep the rack nice and tidy. Four pieces are included in one pack.



Items included



4 x Patchcatch

Technical Information

Plastic Parts

Polyoxymethylene POM

Operating Temperature Range

-20°C – 60°C

Ambient Humidity Non-Condensing

10% – 90%

Gross Weight

0.06 kg / 0.13 lbs

Packaging Dimensions

Width: 100 mm Height: 40 mm Depth: 95 mm | Width: 3.93 in Height: 1.57 in Depth: 3.74 in


Custom Tariff Number

39269097

Width: 50 mm / 1.96 in

Depth: 58 mm / 2.28 in

Height: 51 mm / 2 in

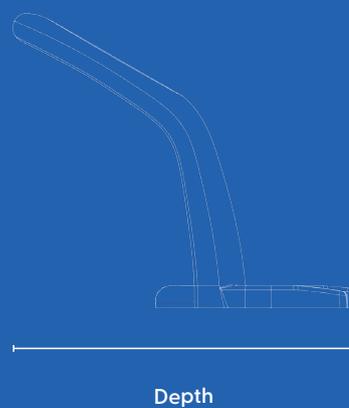


patchbox.one / Blind Panels

The Blind Panels can cover up unused slots from your patchbox.one. This ensures air circulation remains optimised and keeps the temperature in your network cabinet in balance. Simply clip them into the frame and reuse them anytime in another slot. Ten pieces are included in one pack.



Items included



10 x Blind Panel

Technical Information

Plastic Parts

Polyoxymethylene POM

Operating Temperature Range

-20°C – 60°C

Ambient Humidity Non-Condensing

10% – 90%

Gross Weight

0.06 kg / 0.13 lbs

Packaging Dimensions

Width: 100 mm Height: 40 mm Depth: 95 mm | Width: 3.93 in Height: 1.57 in Depth: 3.74 in


Custom Tariff Number

39269097

Width: 17 mm / 0.66 in

Depth: 26 mm / 1.02 in

Height: 43 mm / 1.69 in

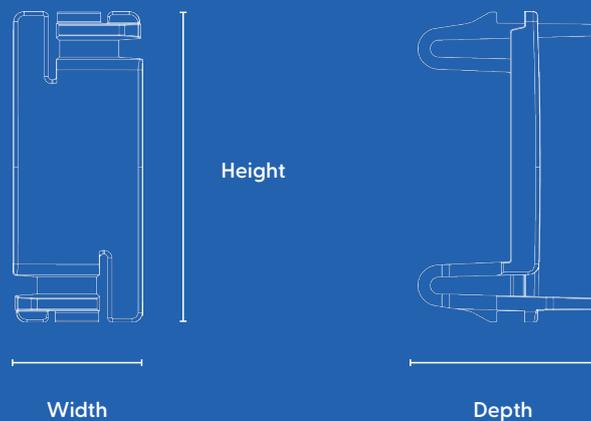



PATCHBOX GmbH
Handelskai 94-96 / 271
1200 Vienna / Austria

sales@patchbox.com
[+43 1 99 71 960](tel:+4319971960)

patchbox.com
shop.patchbox.com
